


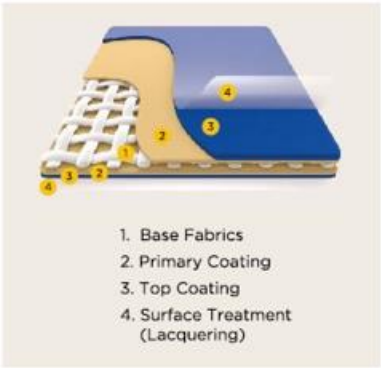

COMPOSITE MEMBRANE

Base Fabrics
A woven Base Fabrics of high tenacity polyester yarns is the base material to provide Tear strength, Tensile strength and Dimensional stability on finished product.

Primary & Top Coating
The primarily PVC coating impregnate the base Cloth to enhance the impressive Dimensional stability, high Tensile strength and high Elongation rupture.

Surface Treatment (Lacquering)
Applying the lacquer on the surface generates the maximum protection quality against atmospheric chemical, microbial and fungal attacks, weather and environment friendly resistance to Ultra Violet Thermal, Rain, Abrasion and Flame Retartdant.

AGTex Coating process
AGTex products line are created by an integrated European coating technology combined with supreme technical expertise.

The liquid form coating which primary consists of PVC ensures the stabilization of the pre-stressed base cloth, filling the air pocket within and bridging interstices to cover the sufacte and generate the impressive durability, tensile and tear strength of the product.

The high performance quality and longevity of our products provides low construction cost, shorter installation time and easy maintenance, enabling AGTex product lines with the ability to provide a wide variety of dramatic functions that fits every sophisticated lifestyle.

WARRANTY

Product
751P1#HTA,
651OP

5 YEAR WARRANTY

Product
651 P1

6 YEAR WARRANTY

Product
751 P1,
751P1#SLV,
851 OP1

7 YEAR WARRANTY

Product
951 P1

9 YEAR WARRANTY

* terms & conditions applies

HIDDEN STRENGTH

STABILITY

DURABILITY

TENSILE STRENGTH

TEAR STRENGTH

KEY ADVANTAGES

FLEXIBILITY

LONGEVITY

RESISTANCE

THERMAL COMFORT

MOULD RESISTANCE

WATERPROOF

COST EFFICIENCY

EASY MAINTENANCE

PRINTABLE

WARRANTY

FLAME RETARDANT

ENVIRONMENTAL FRIENDLY

TAKE THE 60 - SECONDS TOUR

AGTex, stands for the best in Coating Technologies for Technical Textiles

PT ATEJA GRACE TEXINDO is a pioneer in coating technologies for the technical textile Industry of Indonesia, established in 2014 launching their Composite Membrane under the registered trade mark **AGTex**.

The affiliation with the Ateja group as one of the international leading companies which has grown over four decades whilst creating textiles range from the conventional to the technical through a vertical integrated production line, creates another important milestone in our history with **AGTex** products.

The state-of-the-art European technology provided by both foreign and domestic professional experts, integrated with the comprehensive know-how that exists within the Ateja group, which is our priceless asset, renders **AGTex** to produce a coating technology for technical textiles of paramount quality that is able to vigorously adapt to the latest trends and innovations of today and tomorrow.



ARCHITECTURAL ROOFINGS



TECHNICAL PROPERTIES

Category	651P1	751P1	951P1	651OP	851OP1	751P1#SLV/GLD	751P1#HTA	Unit	Standard
Coating Material	PVC (Polyvinyl Chloride)								
Base Fabric	High Tenacity Polyester								
Yarn Size	1100	1100	1100	1100	1100	1100	1100	DTex	EN ISO 2076
Total Weight	650	750	950	650	850	750	750	gr/m ²	EN ISO 2286-2
Width	250	250	250	250	250	250	250	cm	
Thickness	0.50	0.65	0.75	0.50	0.65	0.65	0.65	mm	EN ISO 2286-2
Tensile (Max/Min)	280/280	300/300	400/400	300/300	300/300	300/300	300/300	daN/5cm	EN ISO 1421
Tear (Max/Min)	28/28	30/30	50/50	30/30	30/30	30/30	30/30	daN	DIN 53363
Resistance (Cool - Heat)	-30 - +70								
Adhesion (Max/Min)	9.5/9.5	10/10	12/12	9.5/9.5	10/10	10/10	10/10	daN/5cm	EN ISO 2411
Flame Retardancy	B1 (DIN 4101-1), B-s1, d0 (EN 13501-1), M2 (NF P 92503), B1/Bs (NFPA701)								
Lacquer (Top/Bottom)	High Concentrate PVDF / Weldable PVDF			Acrylic / Acrylic			High Concentrate PVDF / Weldable PVDF		

The technical specification shown here are based on the best current available and average results from laboratory testing with at ±15% tolerance and provided as a source of information only and do not constitute any agreement concerning the good's warranty and refers to the goods supplied in original state without any processing done by the customer/ The data above are entitled to be modified due to technical progress without prior notice and the customer is fully responsible to check and validity of the above data prior to use.


The specification suggested here does not guarantee the particular application of the customer and it requires the customer to conduct their own comprehensive test concerning suitability of the material for its intended application.


Flame Retardant


650 gr/m²


Warranty Available


Low Wicking

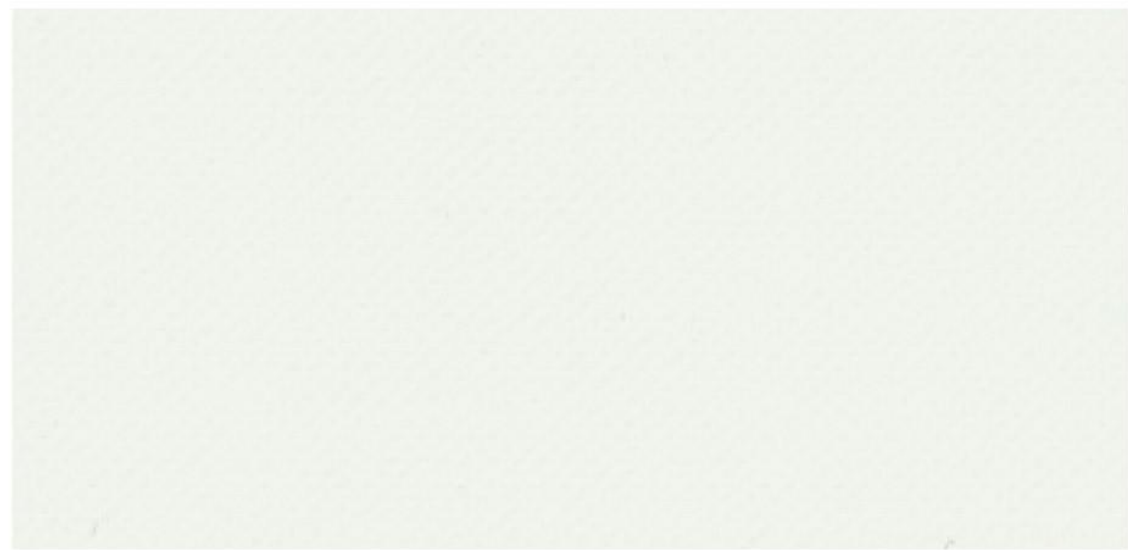


651P1 - 130


Flame Retardant


750 gr/m²


Warranty Available


Low Wicking

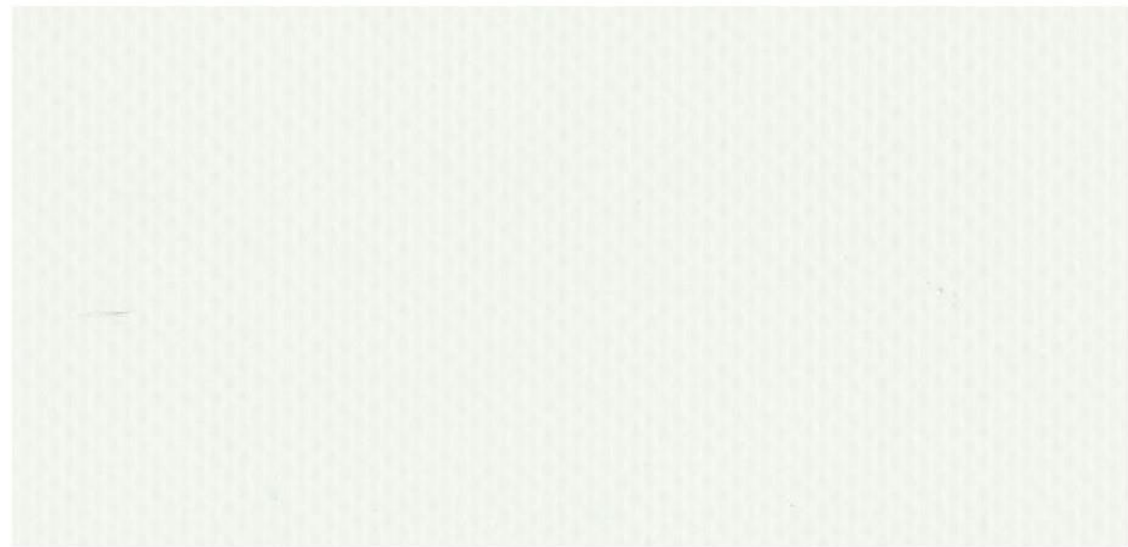

751P1 - 130

Colors available on 751P1:



751P1 - 2302



751P1 - 1406



751P1 - 1600




751P1 - 0105


Flame Retardant


950 gr/m²


Warranty Available


Low Wicking

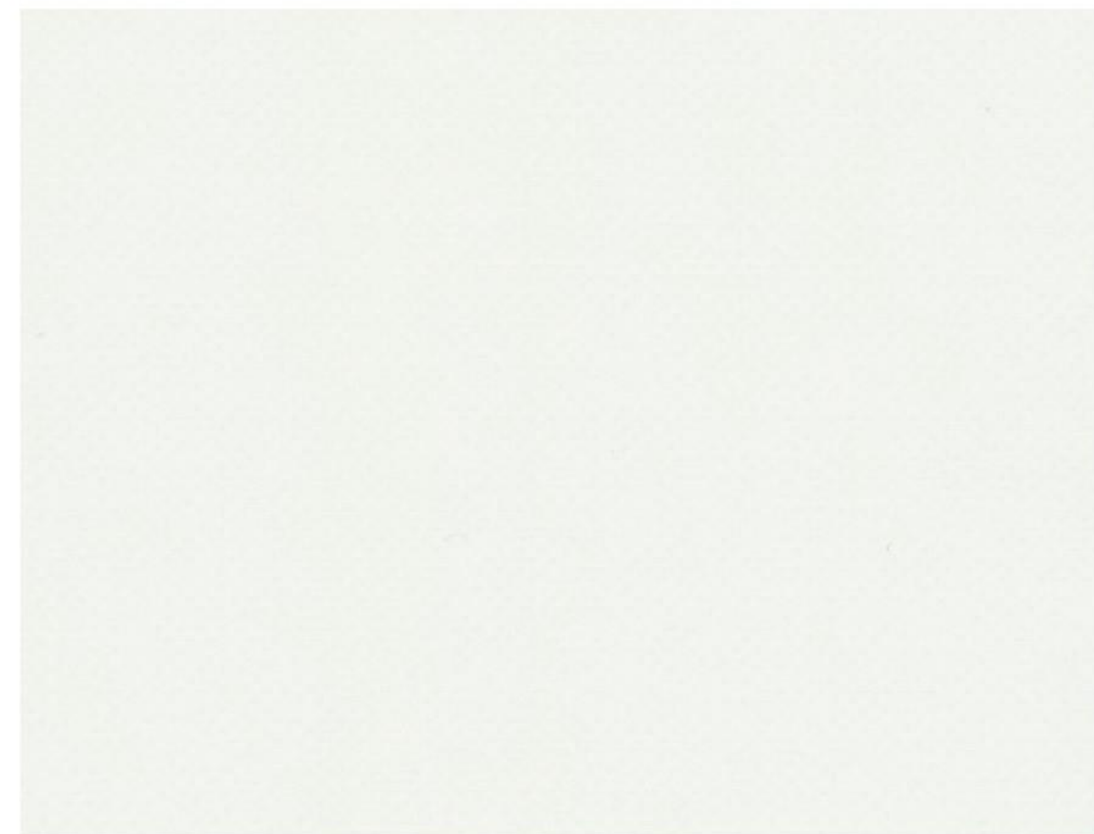

951P1

WHERE ART AND FUNCTION MEETS

AGTex coated Fabrics provide an impressive dimensional stability, tensile strength and tear strength in our product.

Applying a proprietary surface treatment generates maximum protection quality against atmospheric, chemical, microbial, fungal attacks and harsh weather, whilst being resistant to ultra violet rays, thermal damage, rain, abrasion and most importantly being flame retardant.

The performance of our coated fabrics takes the prominent space in dynamic modern lifestyle, where the endless aesthetic design and multi-functionality meets; as such stunning visual delights are created.

The optimum flexibility to any versatile complex shapes permits **AGTex** coated fabrics to vigorously adapt to state-of-the-art trends and technologies for today and tomorrow

The major advantages:

- ✓ Limitless architectural design possibility
- ✓ Low construction cost & efficiency
- ✓ Available for large size roofings & fitting
- ✓ Lightweight and flexible yet strong and durable
- ✓ Easy handling and fast installation
- ✓ Mobile, temporary and permanent basis use
- ✓ Weather and environmental friendly

CLASSIFICATION OF TECHNICAL TEXTILE APPLICATION



BUILDTECH - Construction Textiles
I. Hanging ceiling and sunshade
II. Portable pavilion, tent and marquee
III. Static building roofing and facade



MOBILTECH - Transport Textiles
I. Leisure & recreational water application
II. Heavy vehicles top cover and side curtain
III. Vehicles depot and aircraft hangar



AGROTECH - Agro Textiles
I. Crop container bag and carrier
II. Plantation and storage protection cover
III. Soil stabilizer and irrigation liner



OEKOTECH - Environmental Protection Textiles
I. Protection and evacuation application
II. Ground sealing, landslide and erosion barrier
III. Water treatment, recycling and depositing



INDUTECH - Industrial Textiles
I. Industrial general protective cover
II. Flexible container carrier and storage
III. Industrial cleerspen building

DUTY CLASSIFICATION

I. Light | II. Medium | III. Heavy

The application suggested here does not guarantee the particular application of the customer and it requires the customer to conduct their own comprehensive test concerning suitability of the material for its intended application


BLOCKOUT


Flame Retardant


650 gr/m²


Warranty Available


Low Wicking

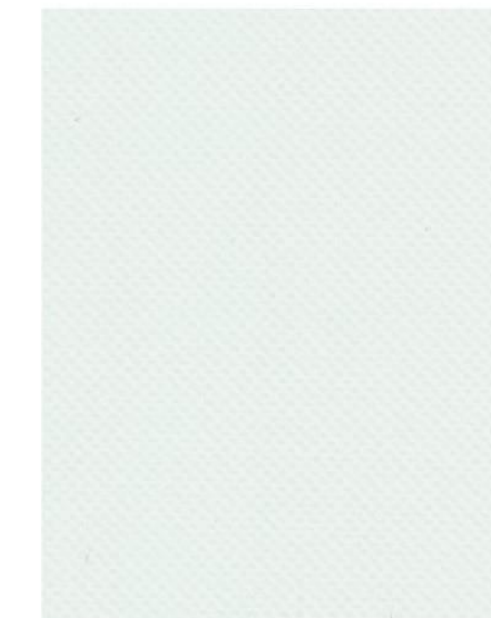


651OP


Flame Retardant


850 gr/m²


Warranty Available


Low Wicking

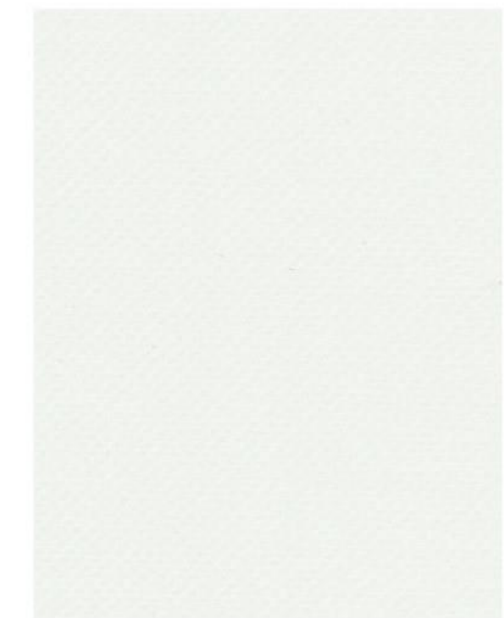

851OP1

SPECIALITIES


Flame Retardant


750 gr/m²


Warranty Available


Low Wicking



751P1#SLV



751P1#GLD



751P1#HTA